



GREEN ACOUSTICS – Yggdrasil CX4

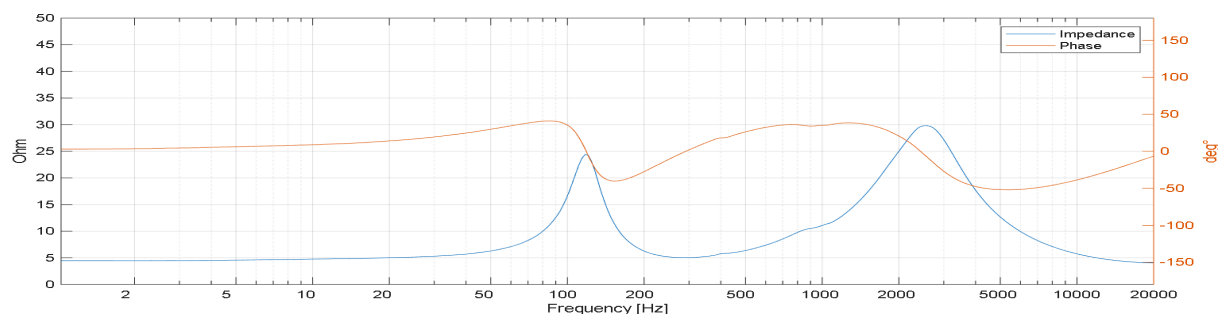

Type	Monitor/Bookshelf/Wall-Mount Loudspeaker.
Model	2-way Closed Cabinet.
Occupied Bandwidth	40kHz.
Sensitivity 200Hz-20000Hz	84dB SPL@1m ref. 2.83Vrms
Sensitivity 300Hz-3000Hz	84dB SPL@1m ref. 2.83Vrms
Frequency Response ± 2 dB (1/3 Oct Smoothing)	80Hz (f3)-20kHz
Maximum Continuous Acoustical Output	105 dB SPL rms. (Half-Space).
Maximum Peak Acoustical Output	108 dB SPL Peak. (Half-Space).
Maximum Continuous Input Power	30 Watt.
Maximum Peak Input Power	60 Watt.
Nominal Impedance	6 Ohm.
Minimum Impedance	4 Ohm.
Maximum Impedance	29.8 Ohm.
Mean Impedance	8.9 Ohm.
Median Impedance	5.7 Ohm.
Tweeter	20mm Aluminium/Magnesium.
Midrange	4.5" Paper Fiber Cone.
Connectors	Mueller Electric
Enclosure	Braced Dense Fibreboard. Resonance Damped.
Int. Protection	Isothermal Damping.
Finishing	High Gloss Lacquer.
Dimension (H x W x D)	181mm x 181mm x 226mm.
Net Weight	3.3 kg
Isolation	Driver Decoupling. Antivibration Feet.
Crossover Topology	Minimum Phase/All Phase Decomposition.
Crossover Components	JANTZEN AUDIO Sp. z o. o.
Wall Mount	M6 CC:76mm.

PRELIMINARY

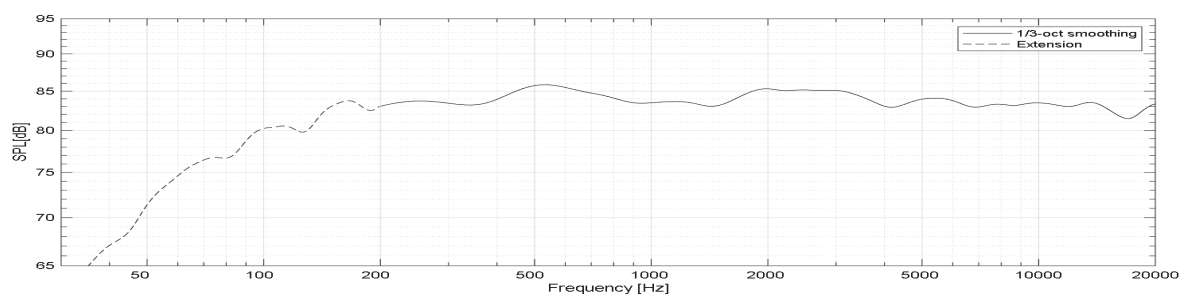

contact@greenacoustics.se

* Specifications are subject to change without any prior notice.
* Warranty voided if driving YCX4 over stated OEM maximum power rating.