


GREEN ACOUSTICS – Yggdrasil CX45



Specifications:

Type	Broadband Monitor/Standmount Loudspeaker.
Model	3-way Closed Cabinet Utilizing Passive Radiator.
Occupied Bandwidth	40kHz.
Sensitivity 200Hz-20000Hz	83dB SPL@1m ref. 2.83Vrms
Sensitivity 300Hz-3000Hz	83dB SPL@1m ref. 2.83Vrms
Frequency Response ± 1.5 dB (1/3 Oct Smoothing)	43Hz (f3) -20kHz
Maximum Continuous Acoustical Output	105 dB SPL rms. (Half-Space).
Maximum Peak Acoustical Output	108 dB SPL Peak. (Half-Space).
Maximum Continuous Input Power	40 Watt.
Maximum Peak Input Power	80 Watt.
Nominal Impedance	4 Ohm.
Minimum Impedance	3.1 Ohm.
Maximum Impedance	14.5 Ohm.
Mean Impedance	4.9 Ohm.
Median Impedance	4.2 Ohm.
Tweeter	20mm Aluminium/Magnesium.
Midrange	4.5" Paper Fiber Cone.
Woofer	5" Paper Fiber Cone.
Passive Radiator	5" Paper Fiber Cone.
Connectors	JANTZEN AUDIO Sp. z o. o.
Enclosure	Braced Dense Fibreboard. Resonance Damped.
Int. Protection	Isothermal Damping.
Finishing	High Gloss Lacquer.
Dimension (H x W x D)	331mm x 181mm x 226mm.
Net Weight	8 kg
Isolation	Driver Decoupling. Antivibration Feet.
Crossover Topology	Minimum Phase/All Phase Decomposition.
Crossover Components	JANTZEN AUDIO Sp. z o. o.

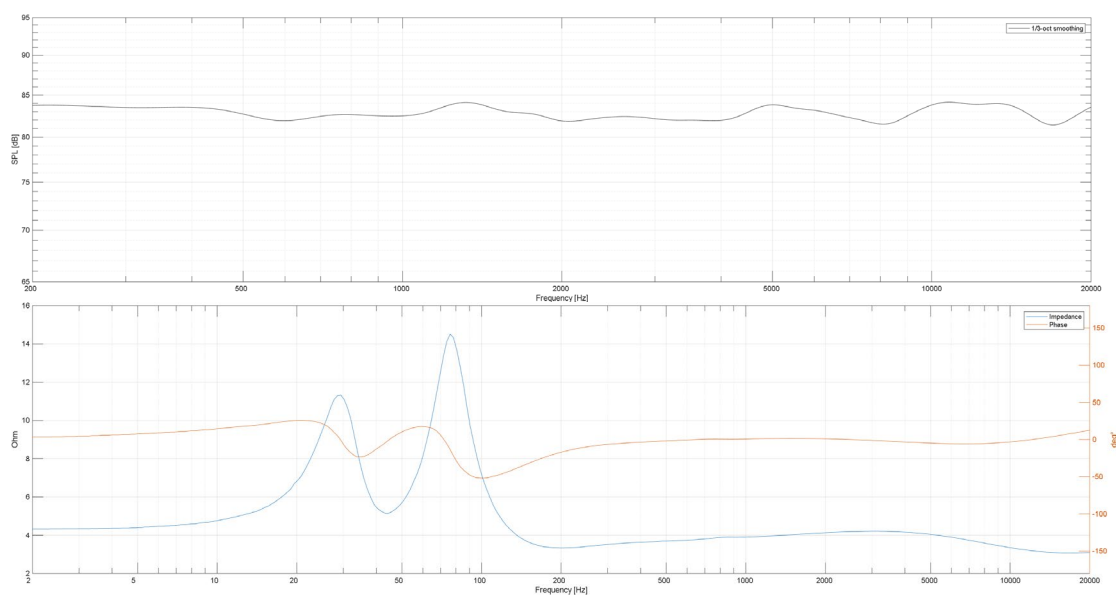

contact@greenacoustics.se

* Specifications are subject to change without any prior notice.

* Warranty voided if driving YCX45 over stated OEM maximum power rating.